




M.2 (NGFF) SSD to SATA III 转接卡带2.5"外壳

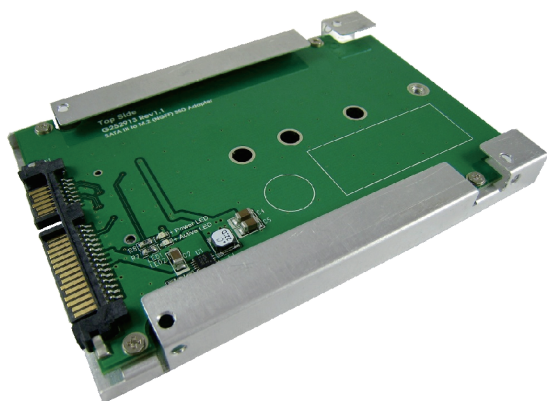

外型尺寸 (单位:mm)

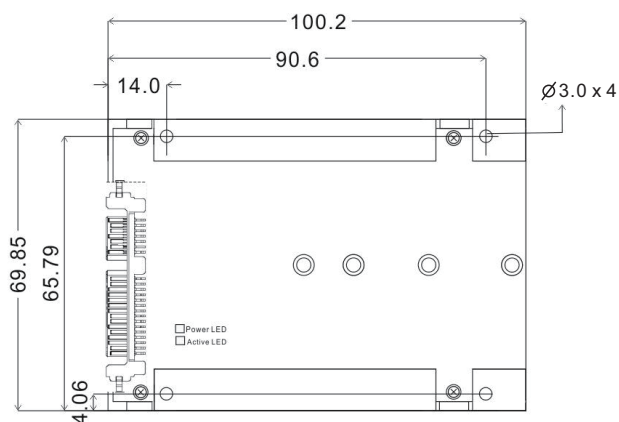

正面

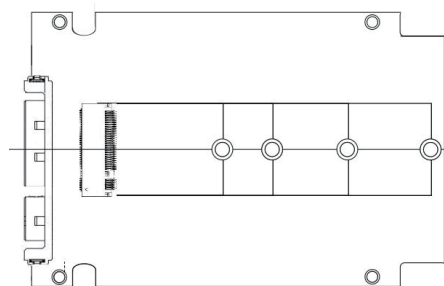

背面

订购信息

产品型号	AD903D
产品描述	SATA III 转 M.2 NGFF SSD 转接卡 带 2.5" SSD 铝制外壳

特色

- 2.5"/9.5mm(高) SSD 外壳外观尺寸大小
- M.2 (NGFF) 转 SATA III 模块
- 标准SATA DEVSLP省电模式
 - Power Pin 3 致能Device sleep
- 绿色 LED 指示SSD通电状态
- 红色 LED 指示SSD动作状态

规格

- 支援 SATA Revision 3.2
- 相容 PCI Express M.2 Spec. Version 1.0
- PWM synchronous buck converter Power IC
 - 提供最大电流3安培
 - 短路保护
 - 瞬间涌浪电流保护
 - 过热关闭供电保护
 - 静电保护 HBM (Human Body Mode)/2KV

支援 M.2(NGFF) SSD 规格大小

- Type 2280-D2-B-M: 80mm(L) x 22mm(W)
- Type 2260-D2-B-M: 60mm(L) x 22mm(W)
- Type 2242-D2-B-M: 42mm(L) x 22mm(W)
- Type 2230-D2-B-M: 30mm(L) x 22mm(W)

Pin	Function	Definition
S1	Ground	1st mate
S2	A+	Differential signal pair A
S3	A-	
S4	Ground	1st mate
S5	B+	Differential signal pair B
S6	B-	
S7	Ground	1st mate
Signal Segment "L"		
Central Connector Gap d		
Power Segment "L"		
P1	V ₃₃	3.3V Power; not used
P2	V ₃₃	3.3V Power; not used
P3	DevSleep	Device Sleep Pin
P4	Ground	
P5	Ground	
P6	Ground	
P7	V ₅	5 V Power
P8	V ₅	5 V Power
P9	V ₅	5 V Power
P10	Ground	
P11	DAS	Device Activity Signal
P12	Ground	
P13	V ₁₂	12 V Power; not used
P14	V ₁₂	12 V Power; not used
P15	V ₁₂	12 V Power; not used