

ADAPTER

SATA Express to mSATA 2 ports



Features

- Build in SFF-8639 male connector
- Build in 2-port Mini PCI-e Female connector
- PWM synchronous buck converter Power IC
 - ※3A maximum output current
 - ※Short circuit protection
 - ※In-rush current suppression
 - ※Thermal shutdown protection
 - ※ESD HBM (Human Body Mode)/2KV
- D1, D4 Green LED on indicates SSD Power ready
- D2, D3 Red LED Blinking indicates SSD active status

Specifications


- SATA Revision 3.2
- SSD_Form_Factor_Version1_a
- SFF-8639 Rev 2.0

Support mSATA Form Factor

- Full size: 50.95 mm (L) x 30mm (W)
- Half size: 26.8 mm (L) x 30 mm (W)

Notice:

System could show two mSATA SSD drives independently.

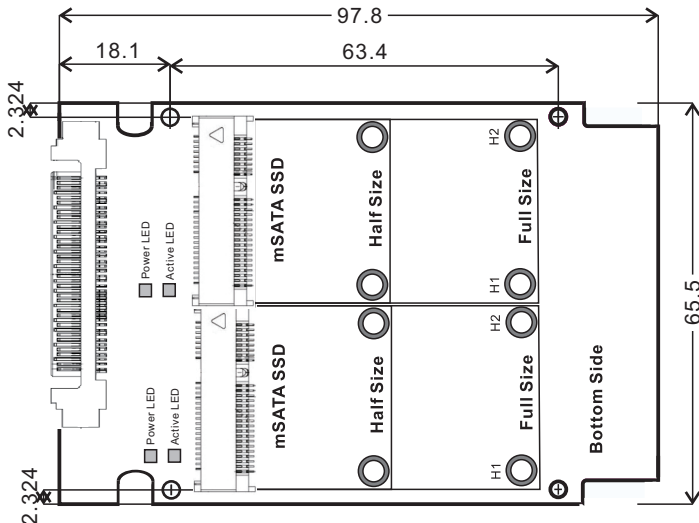

with standard 2.5" Aluminum Housing

SATA
Express

mSATA

2.5"
Standard

