



MINERVA

PU3401F Converter Card

Performance & Burn In Test **Rev. 2. 0**

Table of Contents

1. Overview

2. Performance Measurement Tools and Results

2.1 Test Platform

2.2 Test target and Used M.2 NGFF SSD

2.3 Install Hardware

2.4 BIOS & Windows 10 OS environment setup

2.5 CrystalDiskMark 5.1.2 x64 performance test

2.6 AS SSD Benchmark 1.9 performance test

2.7 ATTO Disk Benchamrk 2.47 performance test

2.8 AnvilBenchmark_V110_B337 Benchmark performance test

3. Burn In Tests and Results

3.1 BurnInTest v8.1 Pro burn in test

4. Summary

PU3401F Converter Card

1. Overview

PU3401F adapter, providing M.2 M-key connector can be M.2 (PCI-e I/F) SSD converted into U.2(SFF-8639), PCI-e Gen 3 / 4 Lanes interface.

2. Tools and Results of Performance Measurement

2.1 Test Platform

2.1 Test Platform

M/B : GIGABYTE **Z170X UD5 TH**
CPU : Intel **i5-6500**, 3.2GHz/ 6M Cache/ LGA1150
Memory : Kingston **KVR21N15D8/8**, **DDR4-2133MHz**, 8G(8GB DIMM*2)
ATX Power : FSP RAIDER 550, **550W ATX**, 12V V2.2 Power Supply
Graphic : Z170 Chipsets built-in **HD Graphics 530**
Adapter: PE0404 PCIe to SFF-8643 Mini SAS HD Cable
CABLE: Amphenol U.2(SFF-8639) to SFF-8463 Mini SAS HD Cable
OS : Microsoft **Windows 10 64bit OS**

2.2 Test target: PU3401F adapter & Samsung SM961 512GB NVMe SSD



PU3401F Adapter



Samsung SM961 M.2 SSD 512GB

2.3 Install Hardware

Insert M.2 SSD into PU3401F converter's M.2 M-key connector, and then with coppers, and screws to fix SSDs. (Please refer to the Installation Notes). Use SFF-8643 to SFF-8639 cable to connect PU3401F converter to **PCI-e adapter of Z170 M/B**.

2.4 BIOS & Windows 10 OS environment setup

2.4.1 Install Windows 10 64bit OS


2.4.2 PU3401F+SM961 SSD Formatted NTFS.

PU3401F Converter Card

2.5 CrystalDiskMark 5.1.2 x64 performance test

※Benchmark (Sequential **Read & Write** / default = **1MB**)


2.5.1 Show **M.2(NVMe)** **Samsung SM961/512GB** performance as below:

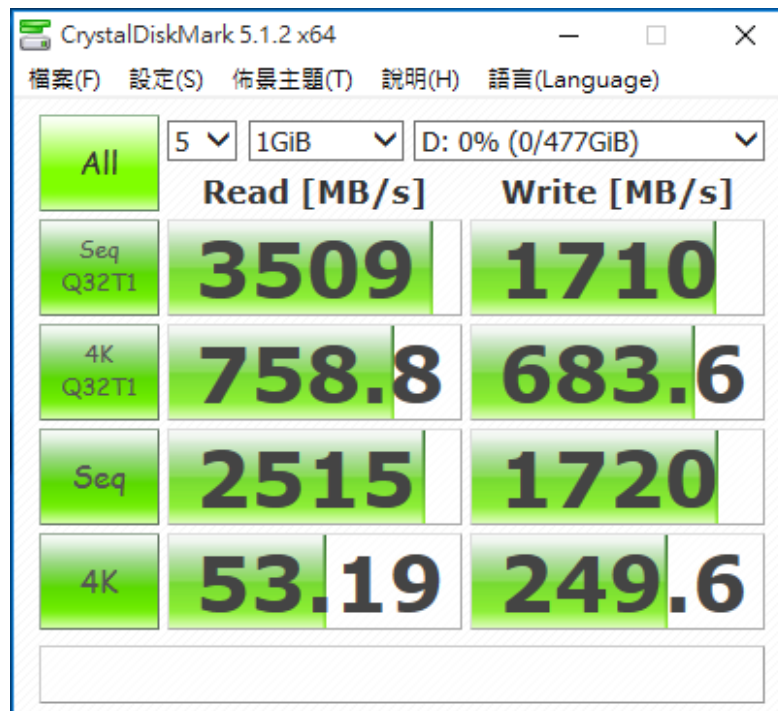

2.6 AS SSD Benchmark 1.9 performance test

※Benchmark (**Read & Write** by MB/s, default block size = **16MB**)


2.6.1 Show **M.2(NVMe)** **Samsung SM961/512GB** performance as below:

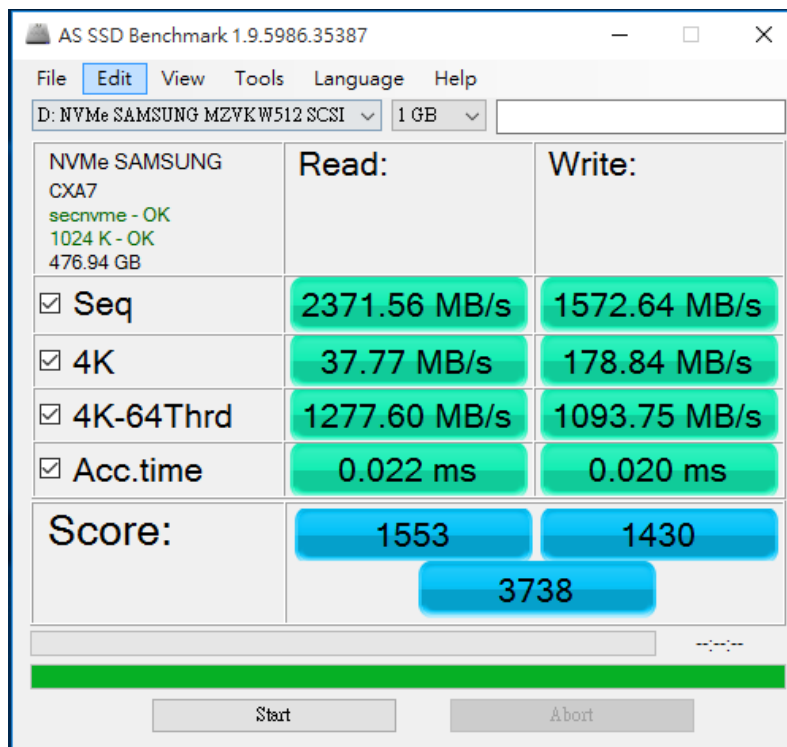

PU3401F Converter Card

2.7 ATTO Disk Benchamrk 2.47 performance test

2.7.1 Show **M.2(NVMe)** **Samsung SM961**/512GB performance as below:

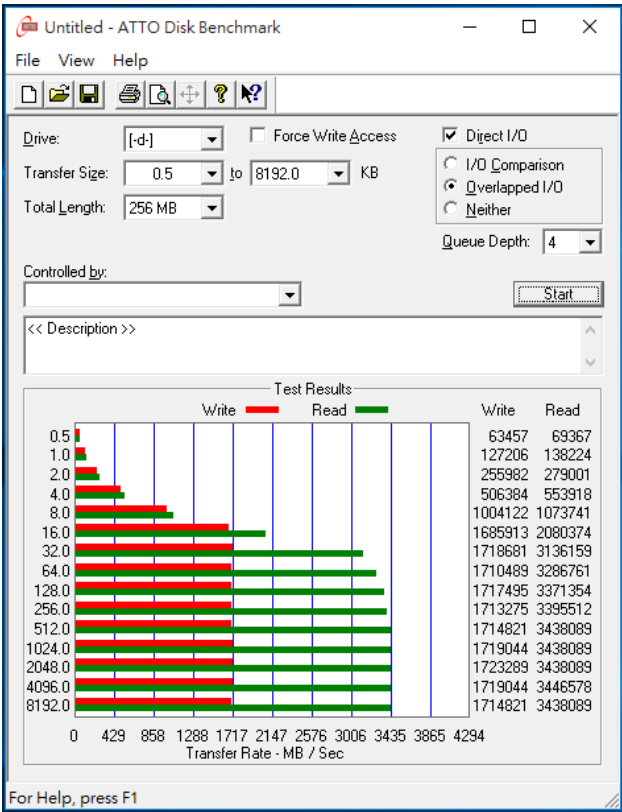

2.8 AnvilBenchmark_V110_B337

2.8.1 Show **M.2(NVMe)** **Samsung SM961**/512GB performance as below:





PU3401F Converter Card

3. Burn In Tests and Results


3.1 BurnInTest v8.1 Pro for **M.2(NVMe) Samsung SM961/512GB**

3.1.1 **system information** as below:

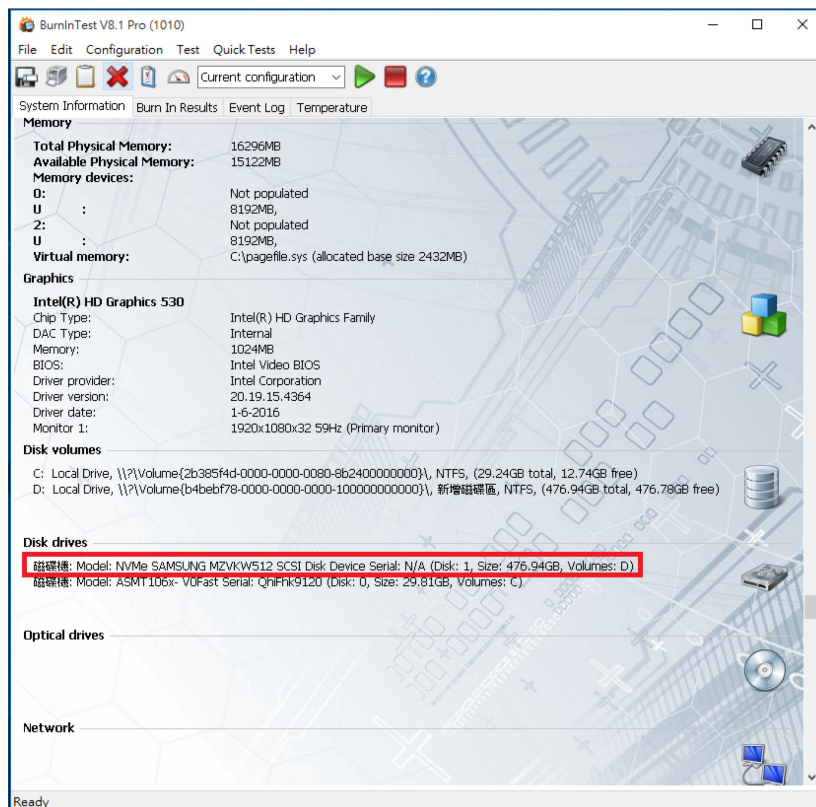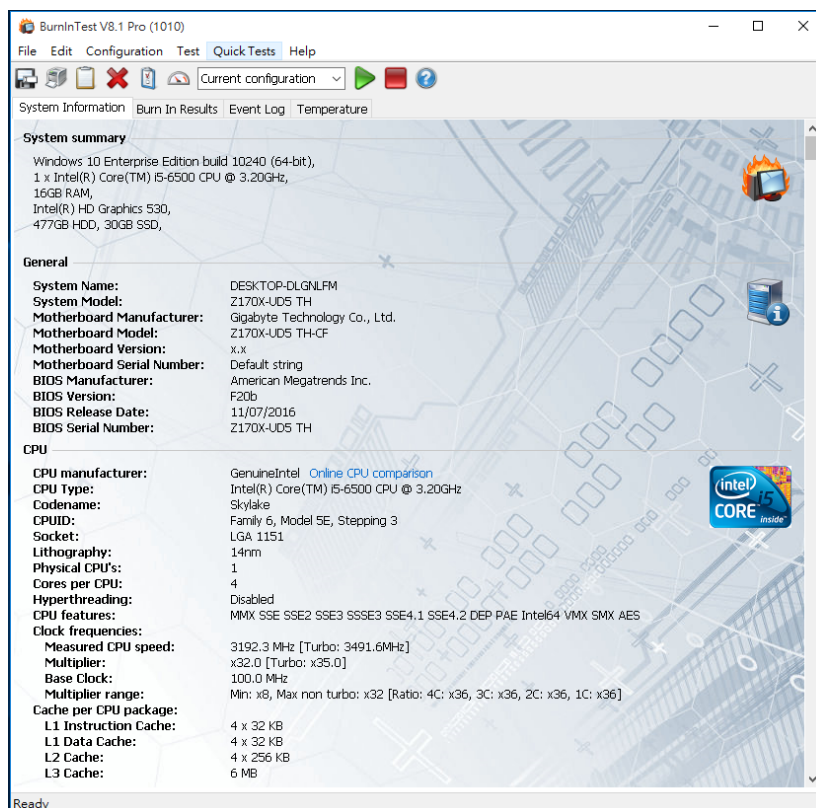


PU3401F Converter Card

3.1.2 show Disk test mode(10 ways cycle test)

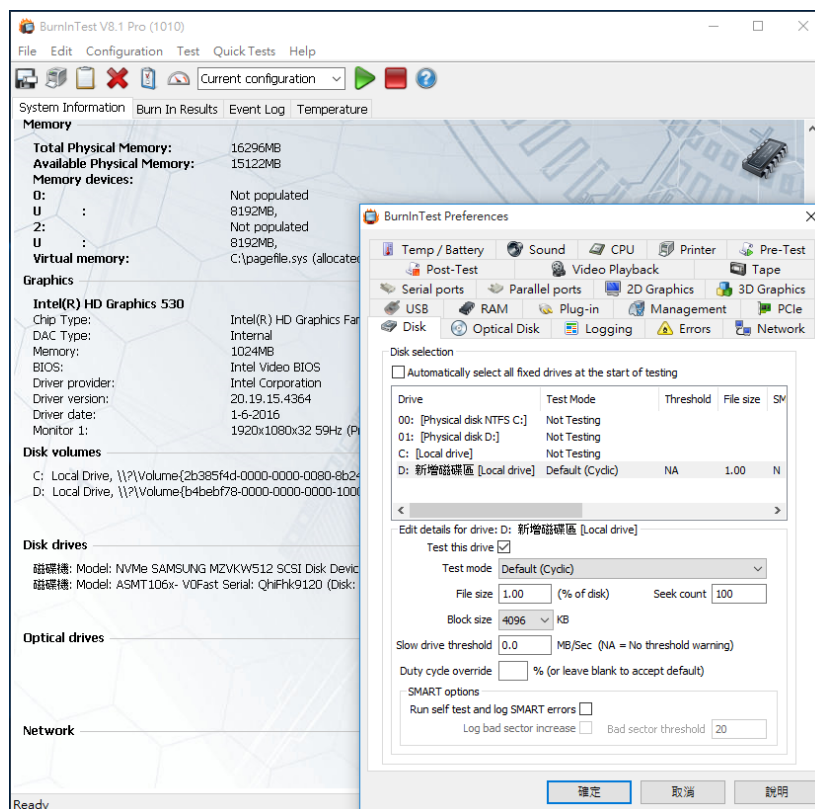

3.1.3 show 24-hour Burn-in test PASSED

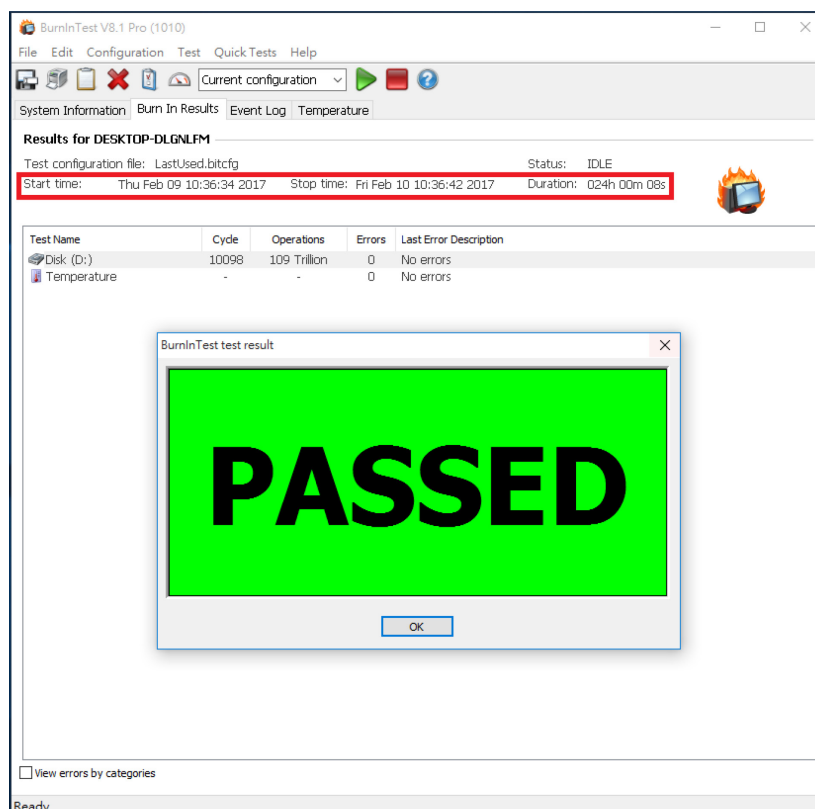

PU3401F Converter Card

4. Summary

- 4.1 M.2 SSD is PCI-e Gen 3 / 4 Lanes Interface, I/O speed, max. to 32Gbps.
- 4.2 PU3401F adapter I/O performance is based on M.2 PCI-e Gen 3 / 4 Lanes SSD.