


# USB 3.1 mirco B to M.2 (B-key) & CFast Card

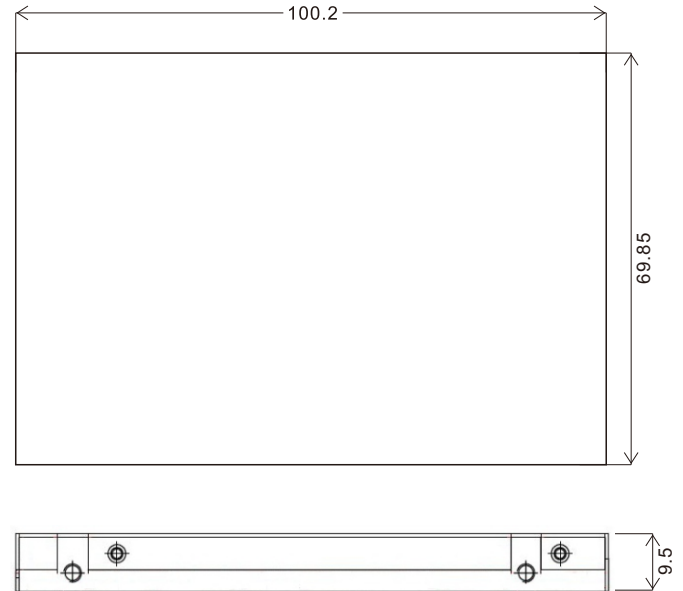

Standard 2.5" Form factor

## Features

- ※ Built in ASM1351 USB 3.1 / 10Gbps high performance processor
- ※ Built in M.2 NGFF B-Key Female connector
- ※ Built in CFast Female connector
- ※ PWM synchronous buck converter Power IC
  - ⊙ 3A maximum output current
  - ⊙ Short circuit protection
  - ⊙ In-rush current suppression
  - ⊙ Thermal shutdown protection
  - ⊙ ESD HBM (Human Body Mode) / 2KV
- ※ D1 Red LED on indicates SSD Power ready
- ※ D2 Red LED blinking indicates SSD active status

## Specifications

- ※ Compliant with USB 3.1 Specification Revision 1.0
- ※ Support UASP and Mass Storage Class Overview Rev1.4
- ※ Support SATA Reversion 3.2
- ※ Compliant with PCI Express M.2 Specification Version 1.0

## M.2 SSD Form Factor Support :

- ※ Type 2230-D2-B-M:30mm(L) x 22mm(W)
- ※ Type 2242-D2-B-M:42mm(L) x 22mm(W)
- ※ Type 2260-D2-B-M:60mm(L) x 22mm(W)
- ※ Type 2280-D2-B-M:80mm(L) x 22mm(W)

*Notice : CFast Card or M.2 SSD, only one can work, M.2 SSD would be priority.*