
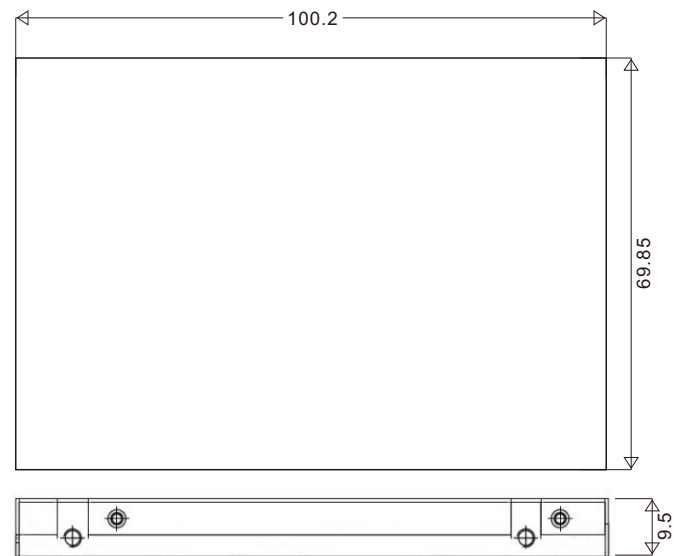


USB 3.1 mirco B to M.2 & mSATA & CFast Card

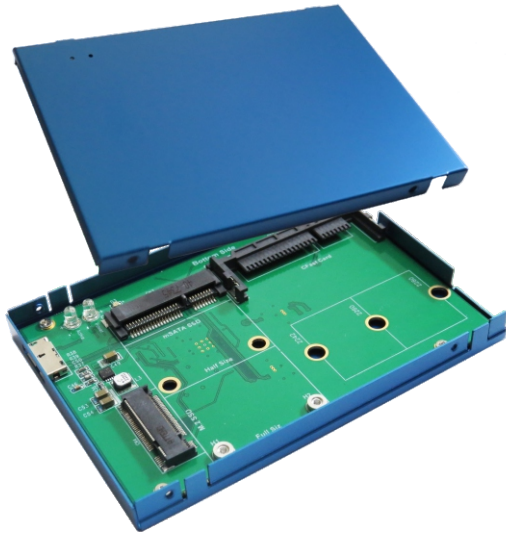

Standard 2.5" Form factor

Features

- ※ Build in ASM1351 USB3.1 high performance processor
- ※ Build in Mini PCI-e Female connector
- ※ Build in M.2 NGFF Female connector
- ※ Build in CFast Female connector
- ※ PWM synchronous buck converter Power IC
 - ◎ 3A maximum output current
 - ◎ Short circuit protection
 - ◎ In-rush current suppression
 - ◎ Thermal shutdown protection
 - ◎ ESD HBM (Human Body Mode)/2KV
- ※ D1 Red LED Blinking indicates SSD active status
- ※ D2 Red LED on indicates CFast, mSATA, M.2 Power ready

Specifications

- ※ Compliant with USB3.1 Specification Revision 1.0
- ※ Support UASP and Mass Storage Class Overview Rev1.4
- ※ Support SATA Reversion 3.2
- ※ Compliant with PCI Express M.2 Specification Version 1.0
- ※ PCI Express Mini Card Electromechanical Specification 1.2

M.2 SSD Form Factor Support :

- ※ Full size: 50.95 mm (L) x 30mm (W)
- ※ Half size: 26.8 mm (L) x 30 mm (W)

M.2 SSD Form Factor Support :

- ※ Type 2230-D2-B-M: 30mm(L) x 22mm(W)
- ※ Type 2242-D2-B-M: 42mm(L) x 22mm(W)
- ※ Type 2260-D2-B-M: 60mm(L) x 22mm(W)
- ※ Type 2280-D2-B-M: 80mm(L) x 22mm(W)

Notice: CFast Card, M.2 SSD or mSATA SSD, only one can work, M.2 SSD would be priority.