



MINERVA

U6245F USB3.1 C-type to mSATA & M.2 converter

Performance & Burn In Test Rev. 1.0

Table of Contents

1. Overview

2. Performance Measurement Tools and Results

2.1 Test Platform

2.2 Test target and Used M.2 NGFF SSD

2.3 Install Hardware

2.4 BIOS & Windows 8.1 OS environment setup

2.5 CrystalDiskMark 5.1.2 x64 performance test

2.6 AS SSD Benchmark 1.9 performance test

2.7 ATTO Disk Benchamrk 2.47 performance test

2.8 AnvilBenchmark_V110_B337 Benchmark performance test

3. Burn In Tests and Results

3.1 BurnInTestv8.1 Pro burn in test

4. Summary

U6245F USB3.1 C-type for mSATA & M.2 Enclosure

1. Overview

U6245F adapter, built-in USB3.1 C-type connector, provides one M.2 B-key connector and one Mini PCI-e connectors. First M.2 SSD inserts M.2 B-key connector or mSATA SSD inserts Mini PCI-e connectors, using USB A-type to C-type cable to connect to the host, either M.2 SSD or mSATA SSD would work alternative.

2. Tools and Results of Performance Measurement

2.1 Test Platform

M/B : ASUS [X99-PRO/USB3.1](#)
CPU : Intel [i7-5820K](#), 3.3GHz/ 15M Cache/ LGA2013-v3
Memory : ADATA DDR4 PC4-1700MHz, 8G(4GB DIMM*2)
ATX Power : COOLER MASTER G750M, [750W ATX](#), 12V V2.31 Power Supply
Graphic : ATI Radeon [HD Graphics 5450](#) Graphics Processor
OS : Microsoft [Windows 8.1 64bit OS](#)

2.2 Test target: U6245F adapter and mSATA SSD(LITE-ON [S930/256GB](#))



U6245F Adapter



Lite On S930 mSATA SSD

2.3 Install Hardware

Inserts M.2 SSD or mSATA SSD to U6245F adapter's M.2 and Mini PCI-e connector, and then use the coppers and screws to fix SSDs (please refer to the installation Notes). Then this adapter through USB cable to connect to USB3.1 port of ASUS [X99-PRO/USB3.1](#).

2.4 BIOS & Windows 8.1 OS environment setup


2.4.1 install Windows 8.1 64bit OS.

U6245F USB3.1 C-type for mSATA & M.2 Enclosure


2.5 CrystalDiskMark 5.1.2 x64 performance test

※Benchmark (Sequential [Read & Write](#) / default = 1MB)

2.5.1 Show [LITE-ON S930](#)/256GB using **C-type Plug Orientation Detection**:

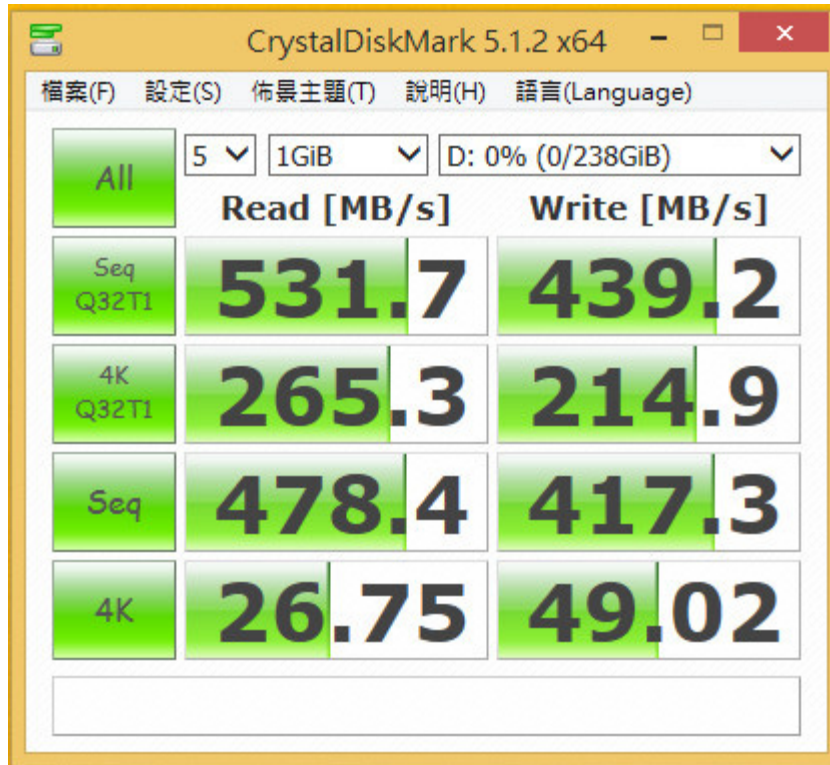

2.5.2 Show [LITE-ON S930](#)/256GB using **C-type Plug Twist Detection**:

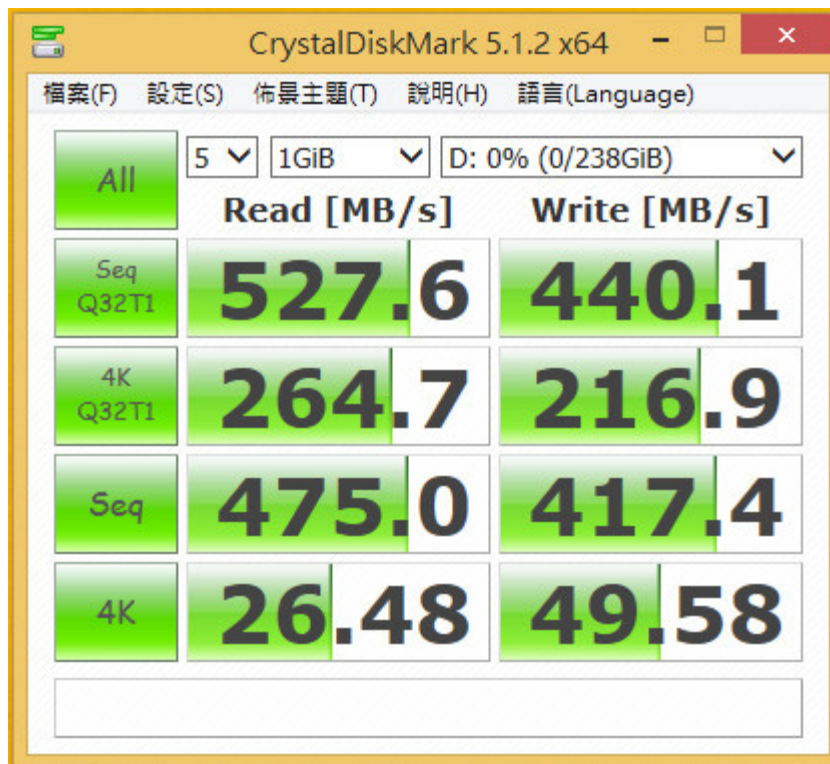


U6245F USB3.1 C-type for mSATA & M.2 Enclosure

2.6 AS SSD Benchmark 1.9 performance test


※Benchmark (Read & Write by MB/s, default block size = 16MB)

2.6.1 Show LITE-ON S930/256GB performance as below:

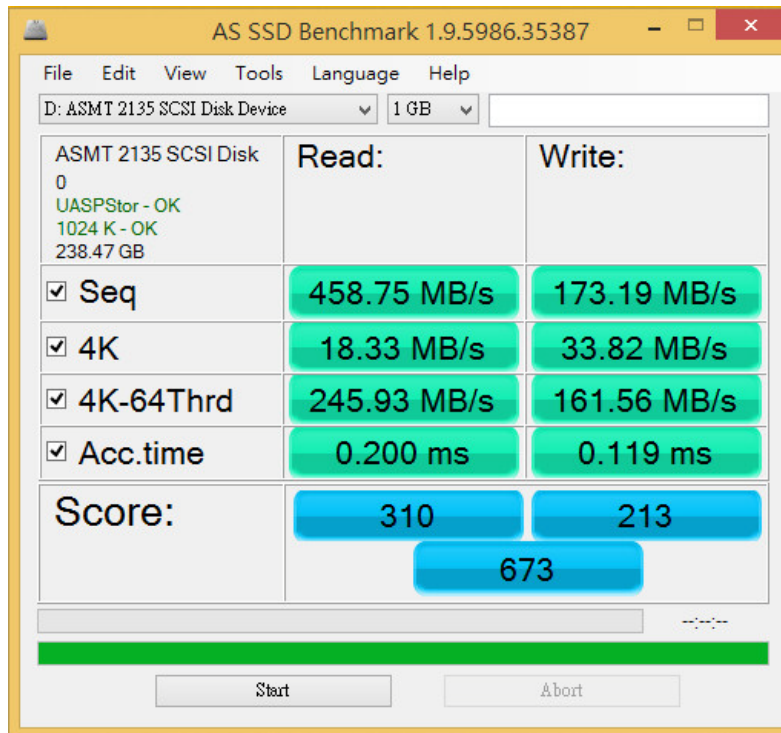

2.7 ATTO Disk Benchmark 2.47 performance test


2.7.1 Show LITE-ON S930/256GB performance as below:

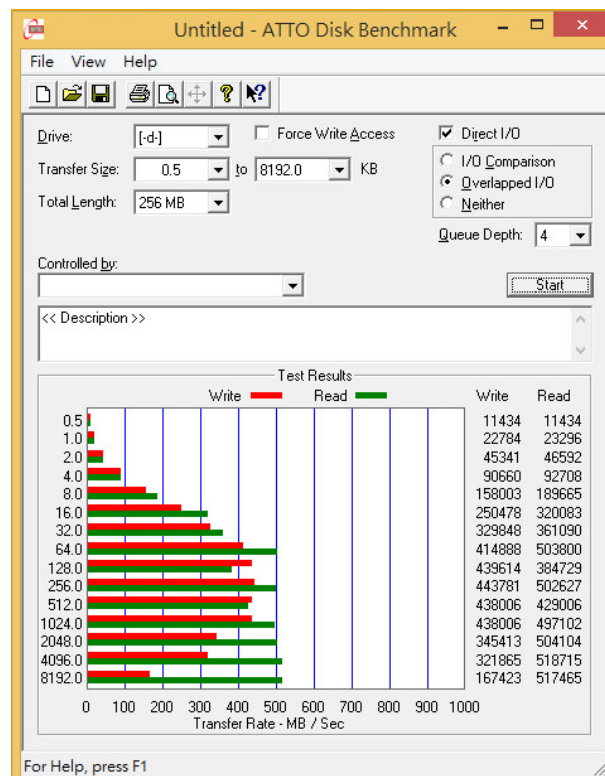

U6245F USB3.1 C-type for mSATA & M.2 Enclosure

2.8 AnvilBenchmark_V110_B337


2.8.1 Show LITE-ON S930/256GB performance as below:

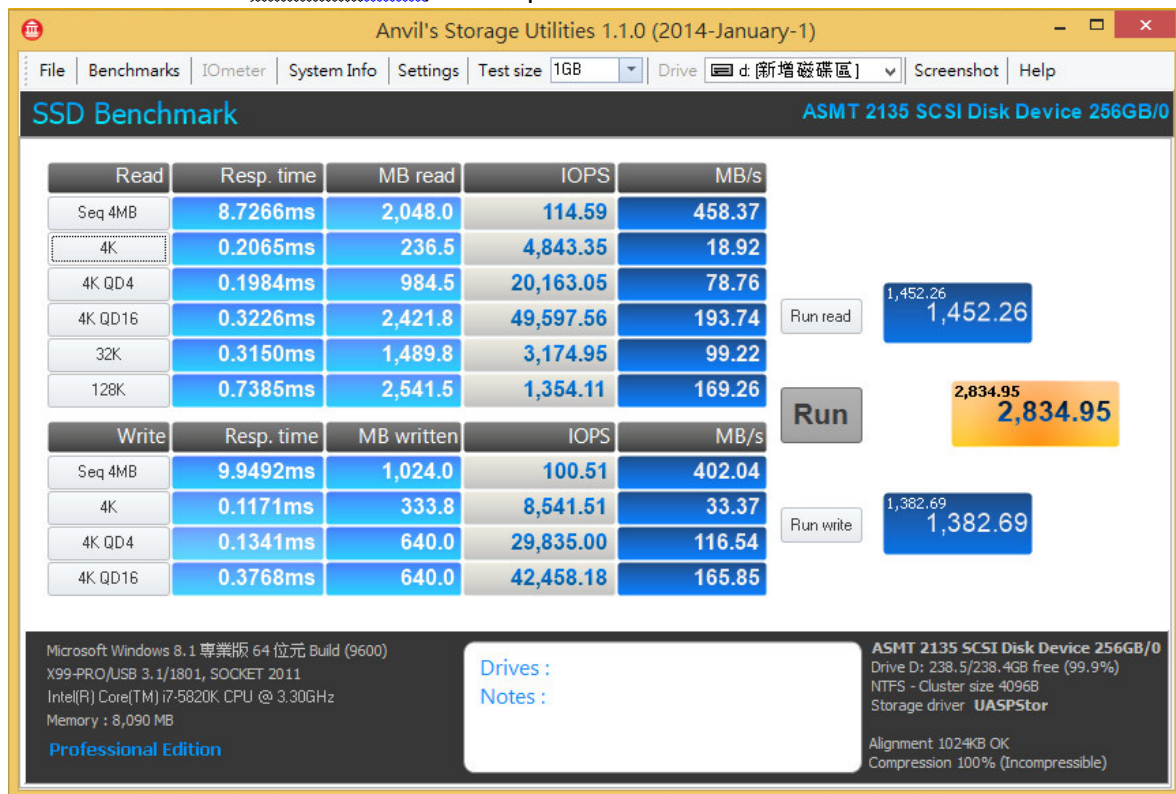


3. Burn In Tests and Results

3.1 BurnInTest v8.1 Pro


3.1.1 system information as below:

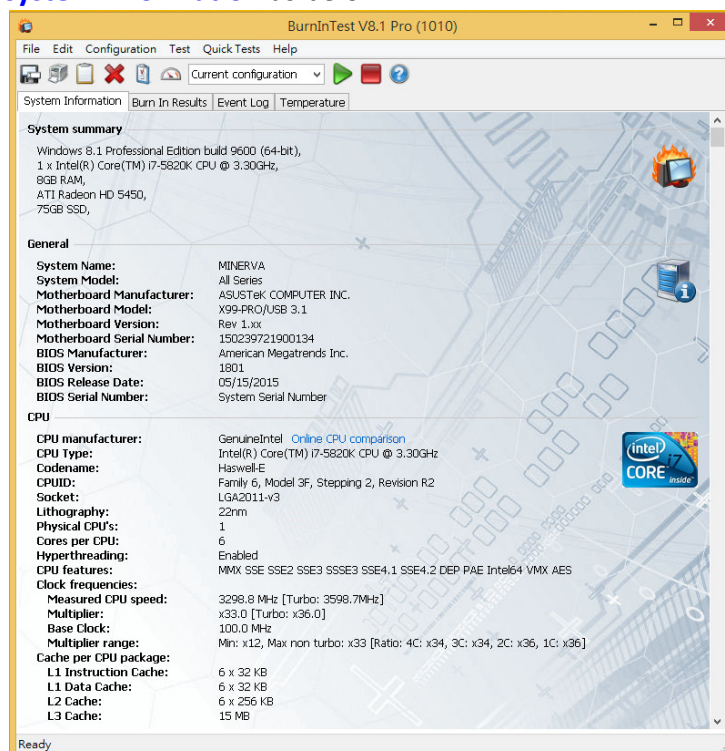

U6245F USB3.1 C-type for mSATA & M.2 Enclosure

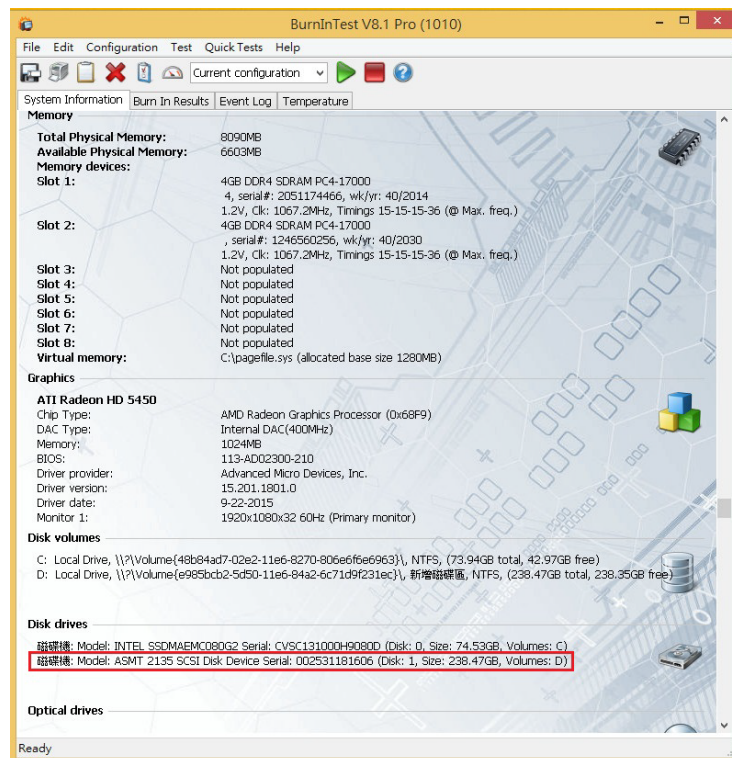


3.1.2 show Disk test mode(10 ways cycle test)

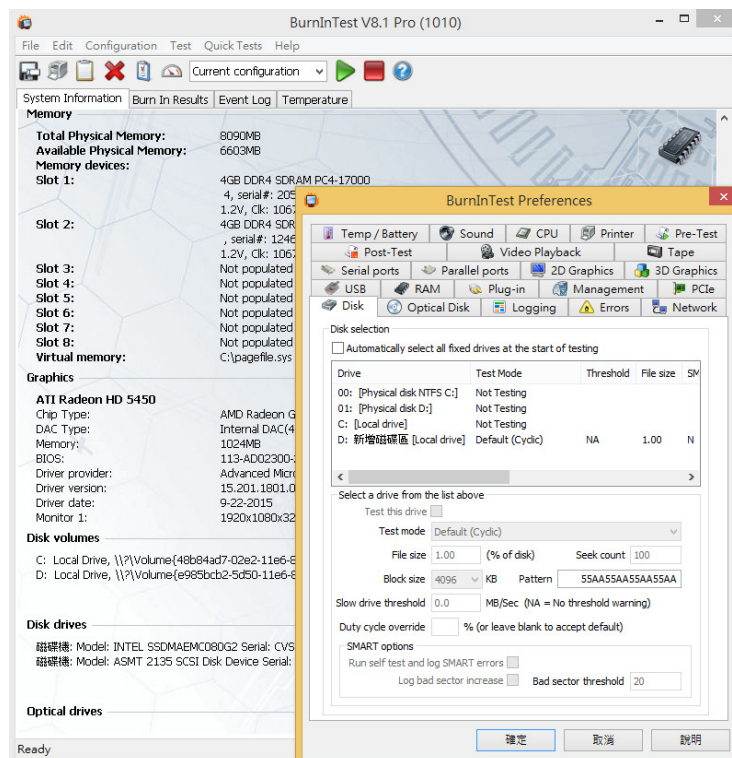

U6245F USB3.1 C-type for mSATA & M.2 Enclosure

3.1.3 show 24-hour Burn-in test **PASSED**

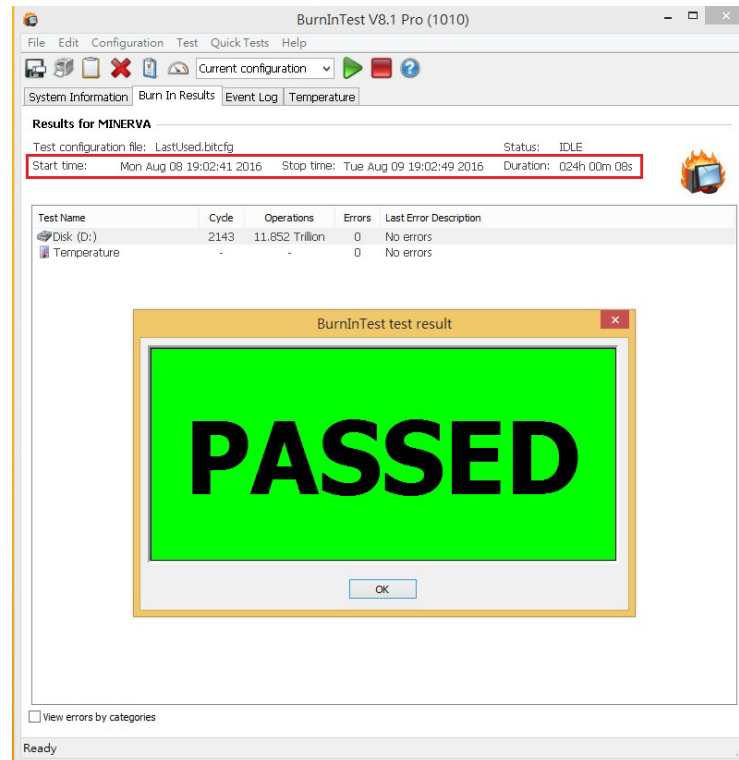

4. Summary

- 4.1 USB 3.1 is 10Gbps Interface.
- 4.2 SATA III is 6Gbps Interface.
- 4.3 mSATA SSD is SATA III Interface, I/O speed, max. to 600MB/s.
- 4.4 U6245F adapter I/O performance is based on M.2 SSD.